

Specifications R140W-9A

ENGINE

MODEL		CUMMINS QSB6.7
Type	Water cooled, 4 cycle Diesel, 6-Cylinders in line, direct injection, turbocharged, charged air cooled and low emission	
Rated flywheel horse power		
SAE	J1995 (gross)	146 HP (109 kW) / 2,100 rpm
	J1349 (net)	136 HP (101 kW) / 2,100 rpm
DIN	6271/1 (gross)	148 PS (109 kW) / 2,100 rpm
	6271/1 (net)	138 PS (101 kW) / 2,100 rpm
Max. torque		74.7 kgf.m (540 lbf.ft) / 1,500 rpm
Bore x stroke		107 x 124 mm (4.21" x 4.88")
Piston displacement		6,700 cc (409 in³)
Batteries		2 x 12 V x 100 AH
Starting motor		24 V - 4.8 kW
Alternator		24 V - 95 Amp

* This engine meets the EPA (Tier 4 interim) / EU (Stage III-B) Emission regulation.

HYDRAULIC SYSTEM

MAIN PUMP	
Type	Two variable displacement piston pumps
Max. flow	2 x 172 l/min (45.4 US gpm / 37.8 UK gpm)
Sub-pump for pilot circuit	Gear pump
Cross-sensing and fuel saving pump system	

HYDRAULIC MOTORS

Travel	Bent - axis piston motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING

Implement circuits	350 kgf/cm ² (4,970 psi)
Travel	380 kgf/cm ² (5,400 psi)
Power boost (boom, arm, bucket)	380 kgf/cm ² (5,400 psi)
Swing circuit	285 kgf/cm ² (4,050 psi)
Pilot circuit	40 kgf/cm ² (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS

No. of cylinder-bore x stroke	Boom : 2-105 x 1075 mm (4.1" x 42.3")
	Arm : 1-115 x 1138 mm (4.5" x 46.8")
	Bucket : 1-100 x 840 mm (3.9" x 33.1")
	Blade : 2-100 x 236 mm (3.9" x 9.3")
	Outrigger : 2-110 x 446 mm (4.9" x 18.7")
	2PC-boom : 1st: 2-105 x 975 mm (4.1" x 38.4") 2nd: 1-145 x 613 mm (5.7" x 24.1")

DRIVES & BRAKES

4-wheel hydrostatic drive. Constant mesh, helical gear transmission provides 2 forward and reverse travel speeds.

Max. drawbar pull		8,500 kgf (18,740 lbf)
Travel speed	1st	10 km/h
	2nd	39 km/h
Gradeability		35° (70 %)

Parking brake : Independent dual brake, front and rear axle full hydraulic power brake.

- Spring activated and hydraulic released
- Wet type multiple disk brake

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm (RH): Boom and bucket (ISO)
Engine throttle	Electric, Dial type

AXLE & WHEEL

Free oscillation front axle which can be blocked automatically or manually.
Fixed rear axle for max. stability.

Tires	10.00 - 20 - 14PR, Dual (tube type)
(optional)	9.00 - 20, Dual (solid type)

SWING SYSTEM

Swing motor	Fixed displacement axial piston motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	11.7 rpm

STEERING SYSTEM

Hydraulically actuated, orbitrol type steering system.

Min. turning radius	6.3 m (20' 8")
---------------------	----------------

COOLANT & LUBRICANT CAPACITY

	liter	US gal	UK gal	
Fuel tank	270	71.3	59.4	
Engine coolant	19.5	5.2	4.3	
Engine oil	23.7	6.3	5.2	
Swing device - gear oil	2.5	0.7	0.5	
Axle	Front	13.8	3.65	3.04
	Rear	16.1	4.3	3.5
Hydraulic system (including tank)		210	55.5	46.2
Hydraulic tank		124	32.8	27.3

UNDERCARRIAGE

Reinforced box-section frame is all-welded, low-stress.
Dozer blade and outriggers are available. A bolt-on design.

Dozer blade	A very useful tool for leveling, back filling or clean-up work.
Outrigger	Maximum stability for digging and lifting work, can be installed on the front and/or rear side.

OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 4,600 mm (15' 1") One-piece boom, 2,100 mm (6' 11") arm, SAE heaped 0.58 m³ (0.76 yd³) backhoe bucket, lubricant, coolant, full fuel tank, full hydraulic tank and all standard equipments.

MAJOR COMPONENT WEIGHT	
Upperstructure	4,680 kg (10,320 lb)
Mono boom (with arm cylinder)	1,030 kg (2,270 lb)
Hydraulic adjustable boom (with adjust cylinder and arm cylinder)	1,430 kg (3,150 lb)

OPERATING WEIGHT		
Undercarriage	Mono boom	Hyd. adjustable boom
Rear dozer blade	13,700 kg (30,200 lb)	14,100 kg (31,090 lb)
Rear outriggers	14,100 kg (31,090 lb)	14,500 kg (31,970 lb)
Front outriggers and rear blade	14,700 kg (32,410 lb)	15,100 kg (33,290 lb)
Front blade and rear outriggers	14,700 kg (32,410 lb)	15,100 kg (33,290 lb)
Four outriggers	15,100 kg (33,290 lb)	15,500 kg (34,170 lb)

BUCKETS R140W-9A

All buckets are welded with high-strength steel.



0.23 (0.30)




0.40 (0.52)
0.46 (0.60)




0.52 (0.68)
0.58 (0.76)



0.65 (0.85)



0.71 (0.93)



0.45 (0.59)



0.55 (0.72)

SAE heaped m³ (yd³)

Capacity m³ (yd³)		Width mm (in)		Weight kg (lb)	Recommendation m (ft.in)						
SAE heaped	CECE heaped	Without side cutters	With side cutters		4.6 (15'1") Boom				4.9 (16'1") Boom		
					1.9 (6'3") Arm	2.1 (6'11") Arm	2.5 (8'2") Arm	3.0 (9'10") Arm	1.9 (6'3") Arm	2.1 (6'11") Arm	2.5 (8'2") Arm
0.23 (0.30)	0.20 (0.26)	520 (20.5)	620 (24.4)	335 (740)	●	●	●	●	●	●	●
0.40 (0.52)	0.35 (0.46)	750 (29.5)	850 (33.5)	410 (900)	●	●	●	●	●	●	●
0.46 (0.60)	0.40 (0.52)	840 (33.1)	940 (37.0)	435 (960)	●	●	●	■	●	●	■
0.52 (0.68)	0.45 (0.59)	915 (36.0)	1,015 (40.0)	460 (1,010)	●	●	■	▲	●	■	■
0.58 (0.76)	0.50 (0.65)	1,000 (39.4)	1,100 (43.3)	480 (1,060)	●	■	■	▲	■	▲	▲
0.65 (0.85)	0.55 (0.72)	1,105 (43.5)	1,205 (47.4)	500 (1,100)	■	▲	▲	—	▲	▲	—
0.71 (0.93)	0.60 (0.78)	1,190 (46.9)	1,290 (50.8)	540 (1,190)	▲	▲	—	—	▲	—	—
■ 0.45 (0.59)	0.40 (0.52)	1,520 (59.8)	1,620 (63.8)	410 (900)	●	●	■	—	■	■	▲
⊙ 0.55 (0.72)	0.45 (0.59)	1,800 (70.9)	1,900 (74.8)	585 (1,290)	■	▲	▲	—	■	▲	▲

■ Ditching bucket

⊙ Slope finishing bucket

●: Applicable for materials with density of 2,000 kg/m³ (3,370 lb/yd³) or less

■: Applicable for materials with density of 1,600 kg/m³ (2,700 lb/yd³) or less

▲: Applicable for materials with density of 1,100 kg/m³ (1,850 lb/yd³) or less

ATTACHMENT R140W-9A

Booms and arms are welded, a low-stress, full-box section design.

4.6 m (15' 1") & 4.9 m (16' 1") booms and 1.9 m (6' 3"); 2.1 m (6' 11"); 2.5 m (8' 2") & 3.0 m (9' 10") arms are available.

DIGGING FORCE R140W-9A


Boom	Length	mm (ft-in)	4,600 (15'1")				Remarks
	Weight	kg (lb)	1,030 (2,270)				
Arm	Length	mm (ft-in)	1,900 (6'3")	2,100 (6'11")	2,500 (8'2")	3,000 (9'10")	
	Weight	kg (lb)	560 (1,230)	580 (1,280)	610 (1,340)	670 (1,480)	
Bucket digging force	SAE	kN	87.3 [94.8]	87.3 [94.8]	87.3 [94.8]	87.3 [94.8]	[: Power Boost
		kgf	8,900 [9,660]	8,900 [9,660]	8,900 [9,660]	8,900 [9,660]	
		lbf	19,620 [21,300]	19,620 [21,300]	19,620 [21,300]	19,620 [21,300]	
	ISO	kN	102 [110.8]	102 [110.8]	102 [110.8]	102 [110.8]	
		kgf	10,400 [11,290]	10,400 [11,290]	10,400 [11,290]	10,400 [11,290]	
		lbf	22,930 [24,890]	22,930 [24,890]	22,930 [24,890]	22,930 [24,890]	
Arm crowd force	SAE	kN	76.5 [83.1]	73.6 [79.9]	62.8 [68.2]	55.9 [60.7]	
		kgf	7,800 [8,470]	7,500 [8,140]	6,400 [6,950]	5,700 [6,190]	
		lbf	17,200 [18,670]	16,530 [17,950]	14,110 [15,320]	12,570 [13,640]	
	ISO	kN	80.4 [87.3]	77.5 [84.1]	65.7 [71.4]	57.9 [62.8]	
		kgf	8,200 [8,900]	7,900 [8,580]	6,700 [7,270]	5,900 [6,410]	
		lbf	18,080 [19,630]	17,420 [18,910]	14,770 [16,040]	13,010 [14,120]	

Note: Boom weight includes arm cylinder, piping and pin

Arm weight includes bucket cylinder, linkage and pin

Dimensions & Working Ranges

DIMENSIONS R140W-9A / MONO BOOM

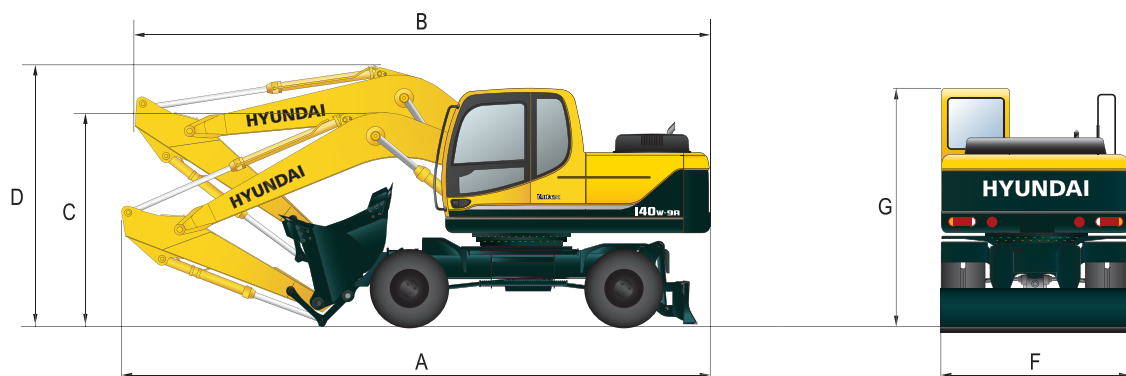


mm (ft · in)

Mono Boom	4,600 (15'1")			
Arm	1,900 (6'3")	2,100 (6'11")	2,500 (8'2")	3,000 (9'10")
A Overall length - shipping position	7,760 (25'6")	7,820 (25'8")	7,770 (25'6")	7,830 (25'8")
B Overall length - traveling position	7,750 (25'5")	7,760 (25'6")	7,690 (25'3")	7,710 (25'4")
C Height of attachment - shipping position	2,760 (9'1")	2,860 (9'5")	2,810 (9'3")	3,100 (10'2")
D Height of attachment - traveling position	3,500 (11'6")	3,500 (11'6")	3,620 (11'11")	3,600 (11'10")
F Overall width	2,500 (8'2")	2,500 (8'2")	2,500 (8'2")	2,500 (8'2")
G Overall height of cabin	3,140 (10'4")	3,140 (10'4")	3,140 (10'4")	3,140 (10'4")

WORKING RANGES R140W-9A / MONO BOOM


mm (ft · in)

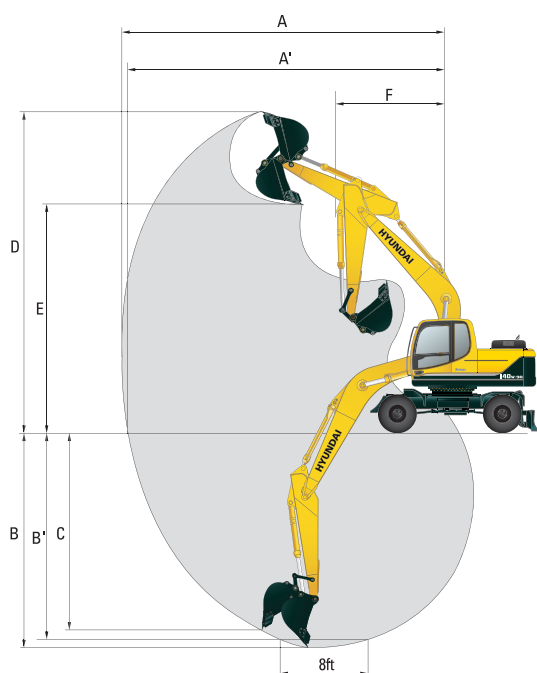

Boom length	4,600 (15'1")			
Arm length	1,900 (6'3")	2,100 (6'11")	2,500 (8'2")	3,000 (9'10")
A Max. digging reach	7,750 (25'5")	7,920 (26'0")	8,320 (27'4")	8,780 (28'10")
A' Max. digging reach on ground	7,530 (24'8")	7,700 (25'3")	8,120 (26'8")	8,590 (28'2")
B Max. digging depth	4,650 (15'3")	4,850 (15'11")	5,250 (17'3")	5,750 (18'10")
B' Max. digging depth (8' level)	4,390 (14'5")	4,600 (15'1")	5,040 (16'6")	5,570 (18'3")
C Max. vertical wall digging depth	4,350 (14'3")	4,460 (14'8")	5,030 (16'6")	5,550 (18'3")
D Max. digging height	8,400 (27'7")	8,470 (27'9")	8,790 (28'10")	9,070 (29'9")
E Max. dumping height	5,960 (19'7")	6,040 (19'10")	6,350 (20'10")	6,620 (21'9")
F Min. front swing radius	2,620 (8'7")	2,670 (8'10")	2,650 (8'8")	2,670 (8'9")

Dimensions & Working Ranges

DIMENSIONS R140W-9A / HYDRAULIC ADJUSTABLE BOOM

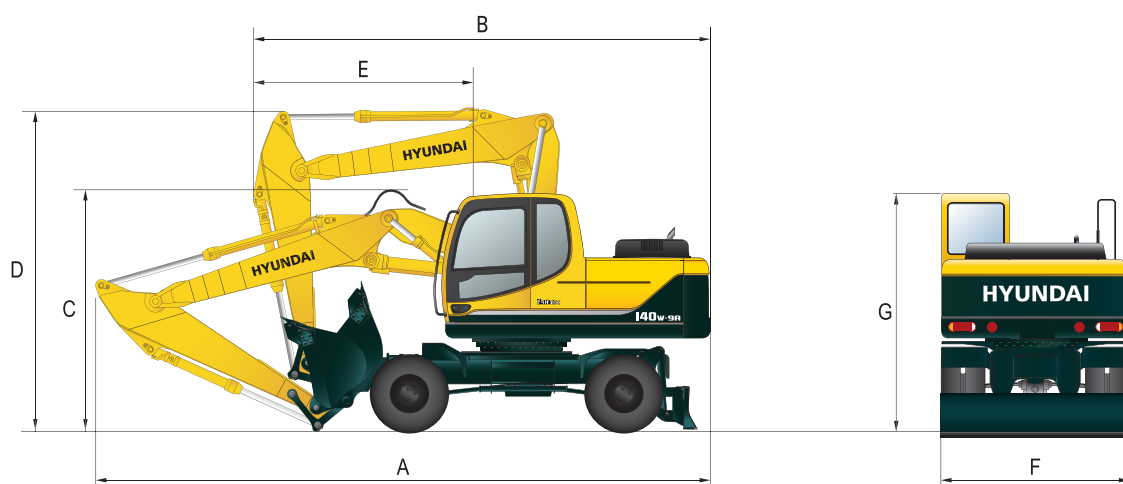


mm (ft · in)

Hydraulic adjustable boom	4,900 (16'1")		
Arm	1,900 (6'3")	2,100 (6'11")	2,500 (8'2")
A Overall length - shipping position	8,140 (26'8")	8,170 (26'10")	8,150 (26'9")
B Overall length - traveling position	6,090 (19'12")	6,110 (20'1")	6,130 (20'1")
C Height of attachment - shipping position	2,960 (9'9")	3,060 (10'0")	3,070 (10'1")
D Height of attachment - traveling position	3,980 (13'1")	3,980 (13'1")	3,980 (13'1")
E End of attachment to steering wheel	2,950 (9'8")	2,970 (9'9")	2,990 (9'10")
F Overall width	2,500 (8'2")	2,500 (8'2")	2,500 (8'2")
G Overall height of cabin	3,140 (10'4")	3,140 (10'4")	3,140 (10'4")


WORKING RANGES R140W-9A / HYDRAULIC ADJUSTABLE BOOM

mm (ft · in)

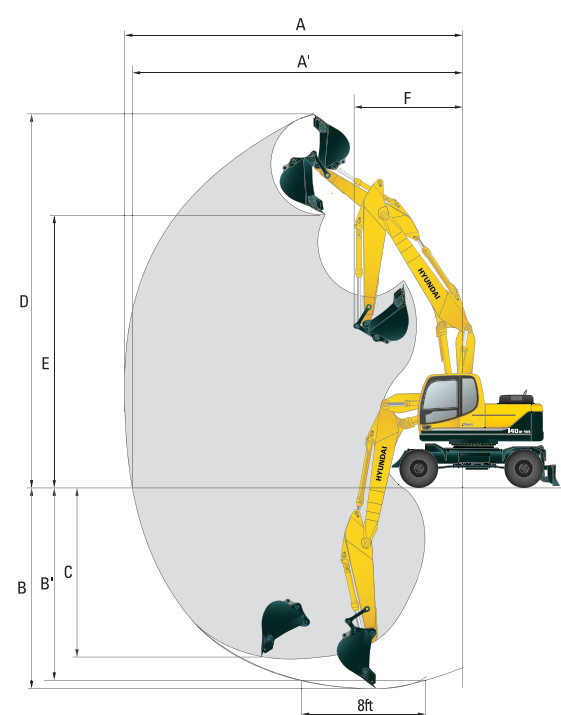


Boom length	4,900 (16'1")		
Arm length	1,900 (6'3")	2,100 (6'11")	2,500 (8'2")
A Max. digging reach	8,140 (26'8")	8,310 (27'3")	8,720 (28'7")
A' Max. digging reach on ground	7,930 (26'0")	8,110 (26'7")	8,530 (28'0")
B Max. digging depth	4,810 (15'9")	5,010 (16'5")	5,410 (17'9")
B' Max. digging depth (8' level)	4,700 (15'5")	4,890 (16'1")	5,310 (17'5")
C Max. vertical wall digging depth	4,190 (13'9")	4,360 (14'4")	4,820 (15'10")
D Max. digging height	9,100 (29'10")	9,180 (30'1")	9,560 (31'4")
E Max. dumping height	6,620 (21'9")	6,700 (22'0")	7,070 (23'2")
F Min. front swing radius	2,660 (8'9")	2,820 (9'3")	2,690 (8'10")


**R140W-9A
WITH REAR DOZER BLADE**

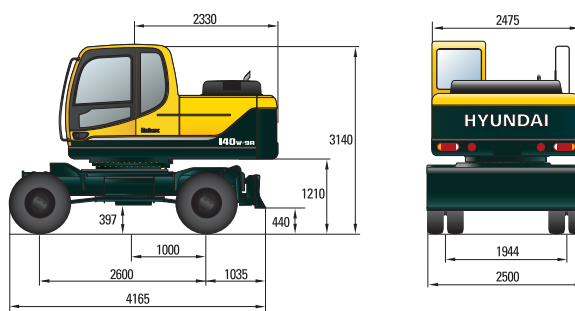


**R140W-9A
WITH REAR OUTRIGGERS**

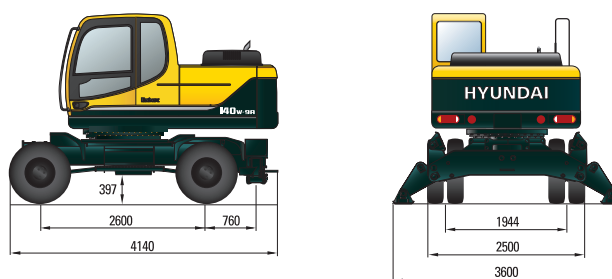


**R140W-9A
WITH REAR DOZER BLADE AND
FRONT OUTRIGGERS**

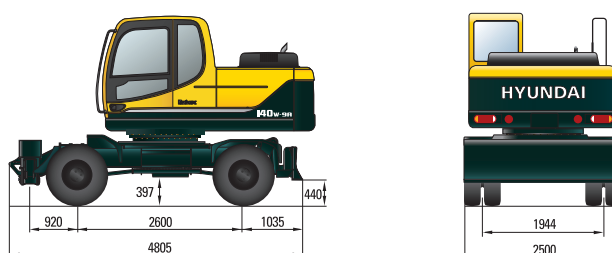

**R140W-9A
WITH REAR AND
FRONT OUTRIGGERS**

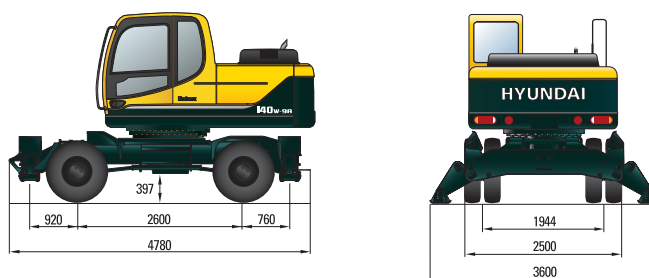

**R140W-9A
WITH REAR OUTRIGGERS AND
FRONT DOZER BLADE**

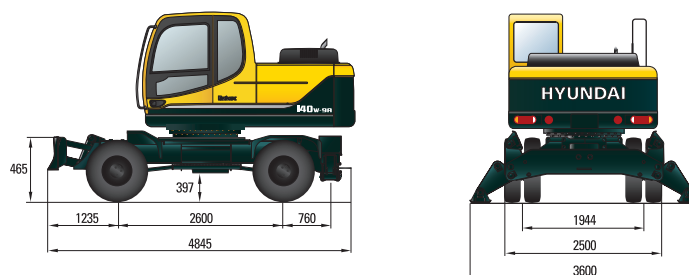

Lifting Capacities

R140W-9A MONO BOOM

Rating over-front Rating over-side or 360 degrees

Boom : 4.6 m (15' 1") / Arm : 1.9 m (6' 3") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius								At max. reach	
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		Capacity	
6.0 m	kg					*3350	*3350			*3200	2080
(20.0 ft)	lb					*7390	*7390			*7050	4590
4.5 m	kg					*3740	3550	*2860	2120	*3310	1610
(15.0 ft)	lb					*8250	7830	*6310	4670	*7300	3550
3.0 m	kg			*7070	6400	*4710	3330	*3900	2050	3370	1420
(10.0 ft)	lb			*15590	14110	*10380	7340	*8600	4520	7430	3130
1.5 m	kg			*7620	5740	*5750	3090	*4340	1960	3320	1380
(5.0 ft)	lb			*16800	12650	*12680	6810	*9570	4320	7320	3040
Ground Line	kg			*8960	5590	*6340	2940	*4600	1890	3590	1480
	lb			*19750	12320	*13980	6480	*10140	4170	7910	3260
-1.5 m	kg	*7690	*7690	*9450	5620	*6250	2920			*3860	1830
(-5.0 ft)	lb	*16950	*16950	*20830	12390	*13780	6440			*8510	4030
-3.0 m	kg			*7750	5800	*5020	3030				
(-10.0 ft)	lb			*17090	12790	*11070	6680				

Boom : 4.6 m (15' 1") / Arm : 2.1 m (6' 11") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius								At max. reach	
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		Capacity	
6.0 m	kg					*3130	*3130			*3050	1950
(20.0 ft)	lb					*6900	*6900			*6720	4300
4.5 m	kg					*3540	*3540	*3210	2120	*3160	1520
(15.0 ft)	lb					*7800	*7800	*7080	4670	*6970	3350
3.0 m	kg			*6620	6450	*4510	3310	*3770	2040	3230	1340
(10.0 ft)	lb			*14590	14220	*9940	7300	*8310	4500	7120	2950
1.5 m	kg			*8650	5730	*5580	3060	*4230	1930	3180	1300
(5.0 ft)	lb			*19070	12630	*12300	6750	*9330	4250	7010	2870
Ground Line	kg			*9090	5510	*6240	2900	*4540	1860	3420	1390
	lb			*20040	12150	*13760	6390	*10010	4100	7540	3060
-1.5 m	kg	*7380	*7380	*9530	5530	*6240	2860			*3760	1700
(-5.0 ft)	lb	*16270	*16270	*21010	12190	*13760	6310			*8290	3750
-3.0 m	kg	*11710	*11710	*7990	5690	*5240	2950				
(-10.0 ft)	lb	*25820	*25820	*17610	12540	*11550	6500				

Boom : 4.6 m (15' 1") / Arm : 2.5 m (8' 2") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius								At max. reach	
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		Capacity	
6.0 m	kg									*2820	1700
(20.0 ft)	lb									*6220	3750
4.5 m	kg					*3110	*3110	*2980	2150	*2880	1360
(15.0 ft)	lb					*6860	*6860	*6570	4740	*6350	3000
3.0 m	kg			*5700	*5700	*4110	3360	*3500	2050	*2930	1200
(10.0 ft)	lb			*12570	*12570	*9060	7410	*7720	4520	*6460	2650
1.5 m	kg			*8610	5850	*5270	3080	*4030	1930	2900	1160
(5.0 ft)	lb			*18980	12900	*11620	6790	*8880	4250	6390	2560
Ground Line	kg	*3820	*3820	*9000	5500	*6070	2890	*4430	1830	3090	1240
	lb	*8420	*8420	*19840	12130	*13380	6370	*9770	4030	6810	2730
-1.5 m	kg	*6470	*6470	*9740	5460	*6260	2820	*4470	1800	*3510	1480
(-5.0 ft)	lb	*14260	*14260	*21470	12040	*13800	6220	*9850	3970	*7740	3260
-3.0 m	kg	*9750	*9750	*8560	5580	*5620	2870			*3480	2150
(-10.0 ft)	lb	*21500	*21500	*18870	12300	*12390	6330			*7670	4740

- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (*) indicates the load limited by hydraulic capacity.

Lifting Capacities

R140W-9A MONO BOOM

Rating over-front Rating over-side or 360 degrees

Boom : 4.6 m (15' 1") / Arm : 3.0 m (9' 10") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius										At max. reach		
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach
														m (ft)
6.0 m	kg							*2100	*2100			*2570	1480	7.46
(20.0 ft)	lb							*4630	*4630			*5670	3260	(24.5)
4.5 m	kg							*2710	2200			*2590	1210	8.14
(15.0 ft)	lb							*5970	4850			*5710	2670	(26.7)
3.0 m	kg					*3580	3450	*3170	2090	*1780	1350	*2640	1080	8.46
(10.0 ft)	lb					*7890	7610	*6990	4610	*3920	2980	*5820	2380	(27.8)
1.5 m	kg			*7700	6080	*4840	3150	*3770	1960	*2190	1290	2640	1040	8.46
(5.0 ft)	lb			*16980	13400	*10670	6940	*8310	4320	*4830	2840	5820	2290	(27.8)
Ground Line	kg	*3780	*3780	*9530	5580	*5830	2920	*4280	1840	*1820	1250	2780	1100	8.15
	lb	*8330	*8330	*21010	12300	*12850	6440	*9440	4060	*4010	2760	6130	2430	(26.7)
-1.5 m	kg	*5830	*5830	*9890	5450	*6250	2810	*4490	1780			3210	1280	7.48
(-5.0 ft)	lb	*12850	*12850	*21800	12020	*13780	6190	*9900	3920			7080	2820	(24.5)
-3.0 m	kg	*8470	*8470	*9150	5500	*5950	2820	*3320	1810			*3390	1750	6.31
(-10.0 ft)	lb	*18670	*18670	*20170	12130	*13120	6220	*7320	3990			*7470	3860	(20.7)
-4.5 m	kg			*6890	5740									
(-15.0 ft)	lb			*15190	12650									

R140W-9A HYDRAULIC ADJUSTABLE BOOM

Rating over-front Rating over-side or 360 degrees

Boom : 4.9 m (16' 9") / Arm : 1.9 m (6' 3") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius						At max. reach		
		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		Capacity		Reach
										m (ft)
6.0 m	kg			*2960	*2960			*2910	1790	6.70
(20.0 ft)	lb			*6530	*6530			*6420	3950	(22.0)
4.5 m	kg	*4240	*4240	*3500	*3500	*3230	2110	*3010	1410	7.46
(15.0 ft)	lb	*9350	*9350	*7720	*7720	*7120	4650	*6640	3110	(24.5)
3.0 m	kg			*4520	3250	*3630	2020	3080	1250	7.81
(10.0 ft)	lb			*9960	7170	*8000	4450	6790	2760	(25.6)
1.5 m	kg			*5550	2980	*4110	1900	3040	1220	7.81
(5.0 ft)	lb			*12240	6570	*9060	4190	6700	2690	(25.6)
Ground Line	kg	*6150	5410	*6150	2840	*4450	1830	3260	1310	7.47
	lb	*13560	11930	*13560	6260	*9810	4030	7190	2890	(24.5)
-1.5 m	kg	*9320	5480	*6170	2820	*4410	1820	*3580	1590	6.72
(-5.0 ft)	lb	*20550	12080	*13600	6220	*9720	4010	*7890	3510	(22.0)
-3.0 m	kg			*5400	2920					
(-10.0 ft)	lb			*11900	6440					

Boom : 4.9 m (16' 9") / Arm : 2.1 m (6' 11") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius						At max. reach		
		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		Capacity		Reach
										m (ft)
6.0 m	kg			*2770	*2770			*2780	1680	6.91
(20.0 ft)	lb			*6110	*6110			*6130	3700	(22.7)
4.5 m	kg			*3300	*3300	*3090	2110	*2880	1330	7.65
(15.0 ft)	lb			*7280	*7280	*6810	4650	*6350	2930	(25.1)
3.0 m	kg			*4320	3240	*3500	2000	2950	1180	7.99
(10.0 ft)	lb			*9520	7140	*7720	4410	6500	2600	(26.2)
1.5 m	kg			*5380	2950	*4000	1870	2910	1140	7.99
(5.0 ft)	lb			*11860	6500	*8820	4120	6420	2510	(26.2)
Ground Line	kg	*6320	5320	*6040	2790	*4370	1790	3110	1220	7.66
	lb	*13930	11730	*13320	6150	*9630	3950	6860	2690	(25.1)
-1.5 m	kg	*9370	5370	*6140	2760	*4400	1770	*3480	1470	6.93
(-5.0 ft)	lb	*20660	11840	*13540	6080	*9700	3900	*7670	3240	(22.7)
-3.0 m	kg			*5500	2840					
(-10.0 ft)	lb			*12130	6260					











- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (*) indicates the load limited by hydraulic capacity.

Lifting Capacities

R140W-9A HYDRAULIC ADJUSTABLE BOOM

 Rating over-front  Rating over-side or 360 degrees

Boom : 4.9 m (16' 9") / Arm : 2.5 m (8' 2") / Bucket : 0.58 m³ (0.76 yd³) SAE heaped / With rear dozer blade down

Load point height m (ft)		Load radius								At max. reach		
		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach
												m (ft)
6.0 m	kg					*2560	2180			*2580	1470	7.39
(20.0 ft)	lb					*5640	4810			*5690	3240	(24.2)
4.5 m	kg			*2900	*2900	*2800	2140			*2680	1180	8.08
(15.0 ft)	lb			*6390	*6390	*6170	4720			*5910	2600	(26.5)
3.0 m	kg	*5850	*5850	*3940	3290	*3250	2010	*2020	1300	2700	1050	8.40
(10.0 ft)	lb	*12900	*12900	*8690	7250	*7170	4430	*4450	2870	5950	2310	(27.6)
1.5 m	kg	*6100	5580	*5080	2980	*3800	1870	*2540	1250	2660	1020	8.40
(5.0 ft)	lb	*13450	12300	*11200	6570	*8380	4120	*5600	2760	5860	2250	(27.6)
Ground Line	kg	*6370	5300	*5870	2780	*4240	1770			2820	1080	8.09
	lb	*14040	11680	*12940	6130	*9350	3900			6220	2380	(26.5)
-1.5 m	kg	*9040	5290	*6120	2720	*4400	1730			*3240	1280	7.41
(-5.0 ft)	lb	*19930	11660	*13490	6000	*9700	3810			*7140	2820	(24.3)
-3.0 m	kg	*8660	5430	*5730	2770							
(-10.0 ft)	lb	*19090	11970	*12630	6110							

- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (*) indicates the load limited by hydraulic capacity.

STANDARD EQUIPMENT R140W-9A

ISO Standard cabin

All-weather steel cab with 360° visibility
Safety glass windows
Rise-up type windshield wiper
Sliding fold-in front window
Sliding side window (LH)
One key fits all lockable doors
Hot & cool box
Storage compartment & Ashtray
Radio / MP3 Player with remote control and USB-input
Handsfree mobile phone system with USB-charging device, Bluetooth and Radio
Transparent cabin roof-cover
12 volt power outlet (24V DC to 12V DC converter)
Sun visor
Rain guard - front window
Computer aided power optimization (CAPO) system
3-power modes, 3-work modes, User mode
Auto & one-touch deceleration system
Auto warm-up system
Overheat prevention system
Automatic temperature control
Air conditioner & heater
Defroster
Self-diagnostics system
Starting Aid (air grid heater) for cold weather
Centralized monitoring
LCD display
Engine speed or Trip meter
Clock
Gauges
- Fuel level gauge
- Engine coolant temperature gauge
- Hyd. oil temperature gauge
Warning lamps
- Engine warning
- Overload
- Communication error
- Low battery
- Air filter clogging
Indicators
- Max power
- Low speed/High speed
- Fuel warmer
- Auto deceleration
Rearview camera
Door and cab locks, one key
Two outside rearview mirrors
Mechanical suspension seat with heater with seat belt
Adjustable joysticks
Console box tilting system
Two front working lights
Electric horn
Batteries (2 x 12V x 100 AH)
Battery master switch
Removable clean-out screen for coolers
Automatic swing brake
Fuel pre-filter with fuel warmer
Boom holding system
Arm holding system
Accumulator for lowering work equipment
Lower frame under cover
Viscous fan clutch
Rear-blade (550 mm x 2,500 mm)
Dual tires (10.00-20-14PR)
Fuel filler pump (35 ℓ/min)

Safety lock valve for boom cylinder with overload warning device
Double-acting piping kit (clamshell, etc.)
Travel alarm
Boom
Mono boom : 4.6 m; 15' 1"
Arm
2.1 m; 6' 11"
Cabin ROPS (ISO 12117-2)
ROPS (Roll Over Protective Structure)
Hi-mate (Remote Management System)
Smart key

OPTIONAL EQUIPMENT R140W-9A

Beacon lamp
Safety lock valve for arm cylinder
Single-acting piping kit (breaker, etc.)
Quick coupler
Boom
Hydraulic adjustable Boom : 4.9 m; 16' 11"
Arms
1.9 m; 6' 3"
2.5 m; 8' 2"
3.0 m; 9' 10" - not for hydraulic adjustable boom
Cabin FOPS/FOG (ISO/DIS 10262 Level II)
FOPS (Falling Object Protective Structure)
FOG (Falling Object Guard)
Cabin roof-steel cover
Cabin guard-front
Wire net
Cabin lights
Undercarriage
Rear outriggers
Rear dozer blade and front outriggers
Rear and front outriggers
Rear outriggers and front dozer blade
Additional lower frame - reinforced under cover
Seat
Adjustable air suspension seat
Adjustable air suspension seat with heater
Mechanical suspension seat
Dual tires - solid (9.00 - 20)
Dual tires - solid (10.00 - 20 - 14P lube type)
Pattern change valve (2 patterns)

- * Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to international standards.
- * The photos may include attachments and optional equipment that are not available in your area.
- * Materials and specifications are subject to change without advance notice.
- * All imperial measurements rounded off to the nearest pound or inch.

PLEASE CONTACT

